



# ISDN S- INTERFACE MODULES

## SURFACE MOUNT PACKAGE-EN60950/IEC950 DESIGNED

ELECTRICAL SPECIFICATION @25°C:



PART NO.	Turns Ratio (Line:Chip) (±2%)	Line Side Inductance (mH min.)	Interwinding Capacitance (pf max)	Line Side Leakage Inductance (uH max)	DCR Line Side (Ω ±15%)	DCR Chip Side (Ω ±15%)
UT20463-**TS	1split:1split	30	20	12	3.3	1.9
UT20465-**TS	1split:2split	30	20	12	3.3	3.8
UT20468-**TS	1split:2.5split	30	20	12	3.3	4.8

PART NO.	Common mode choke									
	-00TS		-05TS		-10TS		-50TS		-5MTS	
	OCL (uH)	DCR (Ω max.)	OCL (uH)	DCR (Ω max.)	OCL (uH)	DCR (Ω max.)	OCL (uH)	DCR (Ω max.)	OCL (mH)	DCR (Ω max.)
UT20463-**TS	None		50	0.4	100	0.6	500	0.9	5.0	1.5
UT20465-**TS	None		50	0.4	100	0.6	500	0.9	5.0	1.5
UT20468-**TS	None		50	0.4	100	0.6	500	0.9	5.0	1.5

Test Condition:

1. Inductance : Main Transformers 10KHz 100mVrms. CMC 100KHz 20mVrms.
2. Leakage Inductance & Interwinding Capacitance : 100KHz 100mVrms.

### PACKAGES & SCHEMATICS

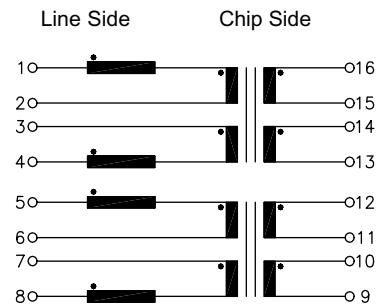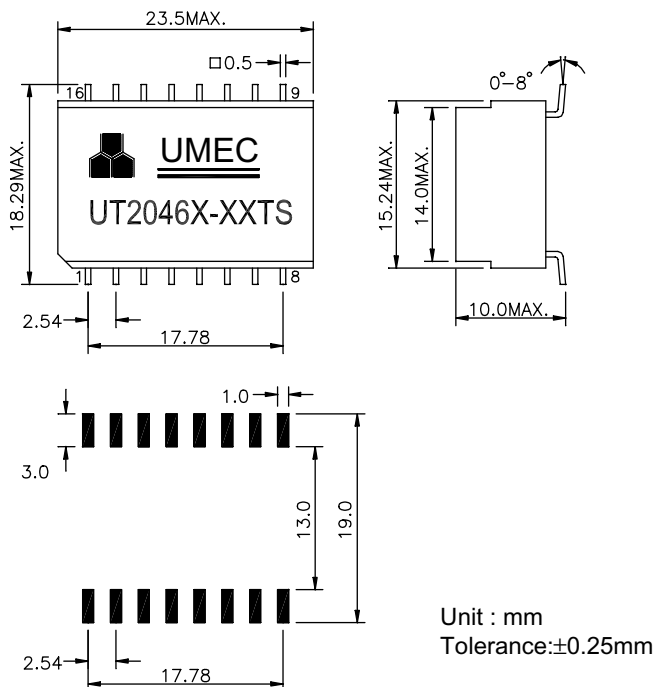

\*Specifications are subject to change without prior notice.

DATA SHEET 09-20 JUL./01  
OF 2

# ISDN S- INTERFACE MODULES

## SURFACE MOUNT PACKAGE-EN60950/IEC950 DESIGNED

- The transmission pulse mask and impedance according to ITU-T-I.430
- Low or high frequency common mode choke option available
- Withstands temperature  $220\pm 5^{\circ}\text{C}$  IR Reflow
- Operating temperature range  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Storage temperature range  $-20^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$
- 4mA Idc Max. Permissible Unbalance DC Current
- Small package for saving space: L/W/H(inch)0.92"x0.55"x0.354"(23.2x14x9mm)
- 3.0KVrms, in according to EN60950/IEC950
- TUV Certificate NO. B000715587040
- UL Certificate NO. E185051

### MODULES SELECTION GUIDE

Chip Manufacturer	Chip Designation	Dual Transformer	Module With 50uH CMC	Module With 100uH CMC	Module With 500uH CMC	Module With 5mH CMC
<b>AMD</b>	AM79C30A/32A	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS
<b>Cologne Chip</b>	HFC-S/S+ISP(A) SPCI(A)	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS
<b>Lucent</b>	T7234/T7250/ T7256/T7259	UT20468-00TS	UT20468-05TS	UT20468-10TS	UT20465-50TS	UT20465-5MTS
	T7903	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS
<b>Mietec</b>	MTC-20172	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS
<b>Mitel</b>	MT8930/8931	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS
<b>Motorola</b>	MC145474/ 145475	UT20463-00TS	UT20463-05TS	UT20463-10TS	UT20463-50TS	UT20463-5MTS
	MC145574	UT20468-00TS	UT20468-05TS	UT20468-10TS	UT20468-50TS	UT20468-5MTS
	MC145575	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS
<b>National</b>	TP3420/3421	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS
<b>SGS Thomson</b>	ST5420/5421	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS
<b>Infineon (Siemens)</b>	PEB2080-81/-84/ 85/-86/2186 PSB2115/2154	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS
	PEB20590/20591 PSB3081/-86/3186/ 21150 PSB21381-84SX	UT20463-00TS	UT20463-05TS	UT20463-10TS	UT20463-50TS	UT20463-5MTS
	PEB20590	UT20463-00TS	UT20463-05TS	UT20463-10TS	UT20463-50TS	UT20463-5MTS
<b>Yamaha</b>	YM7405B	UT20465-00TS	UT20465-05TS	UT20465-10TS	UT20465-50TS	UT20465-5MTS

1. CMC : Common Mode Choke
2. Various of choke inductance are available.

DATA SHEET 09-20 JUL/01  
OF 2