

# UP0301S-( ) ( ) SERIES

## 30 Watt Open Frame Switchers

- ◆ Small Size
- ◆ Universal Input 90 to 264 VAC
- ◆ Conductive EMI Meets FCC/CISPR 22 Class B
- ◆ MTBF 420Khrs



Bauart  
geprüft



### SPECIFICATIONS

All specifications are typical at nominal line, full load and 25°C unless otherwise noted.

### INPUT SPECIFICATIONS

Input Voltage Range ..... 90-264VAC  
Input Frequency ..... 47-63 Hz  
Inrush Current ..... 30A max.(Cold Start)

### GENERAL SPECIFICATIONS

Hold-up Time ..... 16mS typ.  
Efficiency ..... 70% typ.  
Leakage Current ..... 3mA max.  
Short Circuit Protection ..... Continuous  
Overvoltage Protection ..... 5VDC output only  
Continuous Output Power ..... 30W max.  
Hi-pot Isolation: Input / Output ..... 4242 VDC

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature Range ..... 0°C to 70°C  
Derating 50°C to 70°C ..... 2%/°C  
Temperature Coefficient ..... ± 0.02%/°C  
Storage Temperature Range ..... -40°C to +85°C  
Humidity, Non-Condensing ..... 0 to 95% RH  
Cooling ..... Free- Air Convection  
EMI Filter(on Board):  
Conducted ..... Meets FCC/CISPR 22 Class B  
Specification

## OUTPUT SPECIFICATIONS


Model Number	Output <sup>1</sup> Voltage (Volts)	Output Current (Amps)		Peak <sup>2</sup> (Amps)	Total maximum output power (watts)	Ripple <sup>3</sup> P-P (mV)	Total Regulation <sup>4</sup>
		Min.	Rated				
<b>UP0301S-05</b>	5	0	5	6	25	50	± 3%
<b>UP0301S-09</b>	9	0	3	3.3	27	100	± 2%
<b>UP0301S-12</b>	12	0	2.5	3	30	120	± 2%
<b>UP0301S-15</b>	15	0	2	2.4	30	150	± 2%
<b>UP0301S-18</b>	18	0	1.67	2	30	180	± 2%
<b>UP0301S-24</b>	24	0	1.25	1.5	30	240	± 2%

### NOTES:

1. The output voltage is set to ± 1%, with all the outputs at rated load. And the adjustable range is ± 5%.
2. Peak output current lasting less than one minute with duty factor less than 5%. During peak loading voltage may exceed regulation limits.
3. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to the output cable. Peak to peak and RMS metering equipment shall have a 20MHz response with probes and cables maintaining frequency response from 200 Hz to 100MHz bandwidth. Output ripple and spikes are measured directly at the output terminals of the power supply without the use of the probe ground clip.
4. Total regulation is defined as the static output regulation at 25°C, including initial tolerance, line voltage within stated limits. And load currents within stated limits.

## PHYSICAL SPECIFICATIONS

Weight: 180g

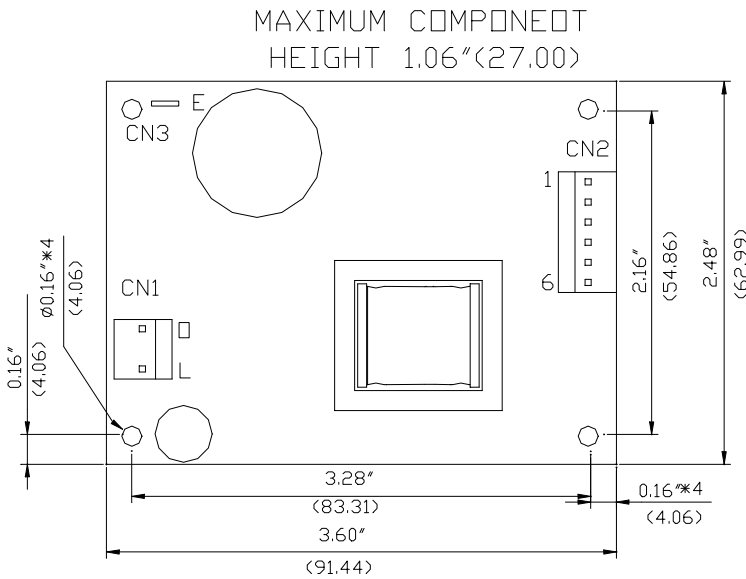

### NOTE:

1. All dimensions in inches (mm).
2. Tolerance .xx = ± 0.05  
.xxx = ± 0.020

CN1 input connector Molex 09-65-2038 with second and fourth pin removed	
Pin	Input voltage
L&N	90-264 VAC
Molex mating connector Molex 5195 series housing with 5194 series crimp terminals	
CN2 output connector Molex pin 09-65-2068	
Model	
Pin	UP0301S-XX
1	Vo
2	
3	
4	Common
5	
6	
Molex mating connector Molex 5195 series housing with 5194 series crimp terminals	
CN3 input ground tab, tab size 4.8*0.5(mm)	
With receptacle for 4.8*0.5(mm) tab	